



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :

A24C 5/18

A1

(11) International Publication Number:

WO 98/36650

(43) International Publication Date:

27 August 1998 (27.08.98)

(21) International Application Number: PCT/GB98/00460

(22) International Filing Date: 13 February 1998 (13.02.98)

(30) Priority Data:

9703358.3

18 February 1997 (18.02.97)

GB

(71) Applicant (for all designated States except US): BRITISH AMERICAN TOBACCO (INVESTMENTS) LIMITED [GB/GB]; Millbank, Knowle Green, Staines, Middlesex TW18 1DY (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): CLARINGBOULD, Anthony, Craig [GB/GB]; Apartment 1, 10 Forest View, Southampton SO14 2BZ (GB). OLIVER, Richard [GB/GB]; 27 Shirley Park Road, Shirley, Southampton SO16 4FQ (GB).


(74) Agents: MACLEAN, Kenneth, John, Hamson et al.; British-American Tobacco Company Limited, R & D Centre, Patents Dept., Regents Park Road, Southampton SO15 8TL (GB).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: INCORPORATING SMOKE-MODIFYING AGENTS IN SMOKING MATERIAL RODS

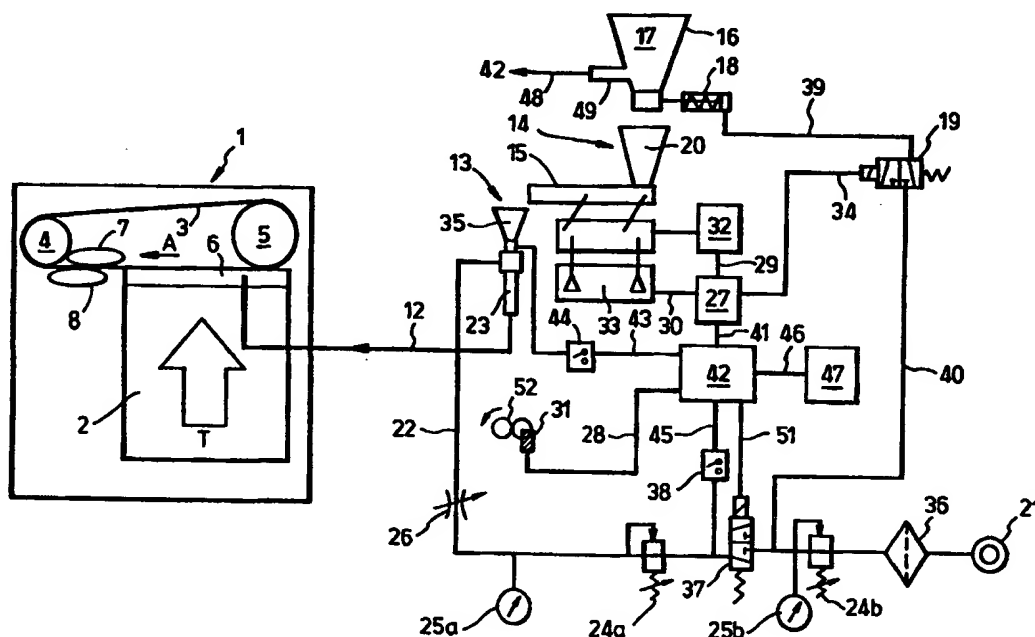

(57) Abstract

A method of, and apparatus for, incorporating particulate smoke-modifying agent in a smoking material rod, wherein said agent is introduced into a flow of filamentary smoking material to the suction band of a rod making machine, the location of introduction being in the vicinity of the suction band of said machine.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Incorporating Smoke-Modifying Agents
in Smoking Material Rods

The subject invention relates to the incorporation of particulate smoke-modifying agents in smoking material rods.

It has heretofore been proposed to incorporate a particulate smoke-modifying agent in a tobacco rod of a cigarette. Thus, for example, it has been proposed in GB 1 349 537 to admix encapsulated flavourant with cut tobacco cigarette filler and then to feed the thus obtained mixture to a cigarette rod making machine. It was the proposition of U.S. 5,450,863 to adhere a particulate burn rate substance to adhesive printed on cigarette paper, such that the substance adheres to the paper in accordance with the printed pattern of the adhesive. The cigarette paper so loaded with burn rate modifying substance is then used on a rod making machine for the purpose of making continuous tobacco rod. As will be apparent to those skilled in the art, the proposed method of U.S. 5,450,863 could be used in respect of the incorporation of a particulate smoke-modifying agent in a tobacco rod. It is a teaching of U.S. 4,409,995 that particulate material is deposited on tobacco rod via a bore extending through the garniture tongue of a rod making machine.

It is an object of the subject invention to provide an improved and commercially practical method of incorporating a particulate smoke-modifying agent in a smoking material rod.

The subject invention provides a method of incorporating particulate smoke-modifying agent in a smoking material rod, wherein said agent is introduced into a flow of filamentary

smoking material to the suction band of a rod making machine, the location of introduction being in the vicinity of the suction band of said machine.

Preferably, the location of introduction of the smoke-modifying agent into the flow of filamentary smoking material to the suction band of the rod making machine is at the suction band guide rails. Suitably, the path of introduction of the smoke-modifying agent into the flow of smoking material extends through one of the two guide rails. Alternatively, the path of introduction of the smoke-modifying agent extends through a wall bounding a chimney of a rod making machine and extends vertically, or substantially vertically, within the chimney.

Preferably, the location of the introduction of the smoke-modifying particles relative of the width of the curtain of filamentary smoking material flowing to the suction band is such that the particles are deposited on smoking material which has already been deposited on the suction band, and downstream of the said location, further smoking material of the curtain is deposited over the deposited particles, so as to ensure that the particles are other than at the periphery of the smoking material carpet as finally formed at the downstream end of the lower run of the suction band. Suitably, the said location is at a mid zone of the said curtain of smoking material. Thus, for example, the said location may be situate between about 25% and about 60% of the width of said curtain taken from that end thereof from which smoking material is first deposited on the suction band, and preferably between about 25% and about 40%. The advantages of the said location of the introduction of smoke-modifying particles being at a mid zone of the said

curtain of smoking material include the minimisation of losses in respect of the smoke-modifying particles passing through the suction band, a better smoking article product wherein loss of smoke-modifying agent to sidestream smoke is minimised, and the maintenance of smoke-modifying particles in the smoking article without substantial loss.

By preference the particulate smoke-modifying agent is conveyed to said location of introduction and is introduced into the flow of smoking material by way of being entrained in a flow of gaseous medium, air for example.

Advantageously, the rate of flow of the smoke-modifying agent to the location of introduction is adjustable relative to the speed of operation of the rod making machine, i.e. with any changes in the flow rate of the smoking material to the suction band, such that the smoke-modifying agent is incorporated at a uniform mass quantity per unit length of the smoking material rod. The smoke-modifying agent may, as a result of employment of the subject invention, be present in the smoking material rod at, for example, 10 to 20mg per smoking article unit length of the rod, 16mg for instance.

As an alternative to the flow of smoke-modifying agent to the location of introduction being a continuous flow, the flow may be intermittent, so that in smoking article rods, the product of said machine, the smoke-modifying agent is located at a zone thereof, which zone extends over a fraction only of the length of the rod, at that zone, for example, which accounts for the last few puffs, the last two or three say, in the smoking of a smoking article comprising the rod.

The particulate smoke-modifying agent may comprise, for example, tobacco dust or encapsulated flavourant, menthol for example. In the former case the tobacco dust may be impregnated with a flavourant.

The smoke-modifying agent particles are preferably of spherical shape. The particles may, for example, be of a diameter from about 0.5mm to about 1.0mm. The particles used in any particular instance are preferably of uniform diameter. The particles should not be inter-adherent, but on the contrary a bulk of the particles should be free-flowing.

The subject invention further provides a smoking material rod making machine comprising a suction band, filamentary smoking material feed means and smoke-modifying agent feed means, the smoking material feed means being operable to provide a flow of filamentary smoking material to the suction band and the smoke-modifying agent feed means being operable to introduce smoke-modifying agent into said flow, the location of introduction into said flow being in the vicinity of said suction band.

In order that the subject invention may be clearly understood and readily carried into effect, reference will now be made, by way of example, to the diagrammatic drawings herewith, in which:-

Figure 1 shows parts of a cigarette rod making machine and associated equipment;

Figure 2 shows a transverse section, to an enhanced scale, of a first arrangement taken at a trough guide of the making machine of Figure 1;

Figure 3 shows a transverse section, to an enhanced scale, of a second arrangement taken at a trough guide of the making machine of Figure 1; and

Figure 4 shows a transverse section, to an enhanced scale, of a third arrangement taken at a trough guide of the making machine of Figure 1.

In Figure 1 of the drawings herewith parts of a cigarette rod making machine are designated generally by reference numeral 1. The making machine 1 comprises the well known features of an upwardly extending tobacco-feed chimney 2, a foraminous, metallic suction band 3 trained about rollers 4 and 5 (one of which is a drive roller), a trough guide 6 and ecreteurs 7 and 8.

In operation of the making machine 1, filamentary cut tobacco filler is fed continuously to the lower end of the chimney 2 by conventional feed means (not shown) of the machine 1 and flows upwardly within the chimney 2 (as indicated by arrow T) in an air flow which is maintained under the action of a vacuum which is maintained above the foraminous suction band 3. At the trough guide 6 the filler is deposited on the under side of the lower run of the suction band 3 and is transported, as a carpet on the band 3, forwards (leftwards viewing Figure 1, i.e. in the direction of arrow A) to the location of the ecreteurs 7 and 8, which serve to trim filler from the carpet. As is well known to those skilled in the tobacco art, downstream of the ecreteurs 7 and 8 the tobacco carpet is fed into a garniture (not shown) of the making machine 1 under the action of a transporting garniture band (also not shown) which acts in addition to feed a continuous web of cigarette paper to

the garniture. The garniture serves to enwrap the tobacco in the cigarette paper web to provide a continuous tobacco rod. Signals from a rod density monitoring means (also not shown) downstream of the garniture cause position changes of the ecreteurs 7 and 8 such that the amount of tobacco trimmed from the carpet on the suction band 3 is that requisite to maintain the density of the cigarette rod within specified tolerance limits.

As is indicated by Figures 2 and 3, the trough guide 6 may comprise first and second suction band guide rails 9 and 10. Extending through a guide rail 9 or 10 is a bore 11, which bore 11 is in air flow communication with a delivery tube 12 of a capsule delivery unit which in Figure 1 is designated generally by reference numeral 13. The bore 11 may extend through the guide rail 9 or 10 either horizontally, or substantially horizontally, (as depicted in Figure 2) or the bore 11 may extend through the guide rail 9 at an angle θ to the horizontal (as depicted in Figure 3). The angle θ may be, for example, about 30° . The vertical distance between the centre line of the bore 11, when the bore 11 extends horizontally, or substantially horizontally, through the guide rail 9 or 10, and the underface of the suction band 3 is 20mm (depicted in Figure 2 as x). The vertical distance between the upper surface of the bore 11, when the bore 11 extends through the guide rail 9 or 10 at an angle of about 30° , and the underface of the suction band 3 is 6mm (depicted in Figure 3 as y).

Figure 4 shows that the trough guide 6 may alternatively comprise a delivery tube 12 which extends vertically, or

chimney 2 and trough guide 6. The vertical distance between the outlet end of the delivery tube 12 and the underface of the suction band 3 is 10mm (depicted in Figure 4 as z). In order to prevent gas/tobacco flow disruptions in the chimney a suitably shaped deflector 50 is positioned about the lower end of the delivery tube 12. As will be apparent to those skilled in the art transfer means, for example a brush wheel feeder (not shown), may be positioned at the lower end of delivery tube 12 in order to aid in the acceleration of smoke-modifying agent capsules along the vertical, or substantially vertical, tube 12.

In Figure 1 reference numeral 14 designates generally a capsule feed unit comprising a vibratory, gravimetric feeder 15 (which may be a K-Tron (Trade name) KCL24-KV1 feeder) and a refill device 16. The device 16 comprises a hopper 17 and a pneumatic valve 18, which valve 18 is operable, under action of a control valve 19, via an air line 39, to convey smoke-modifying agent capsules from the hopper 17 to an infeed hopper 20 of the vibratory feeder 15. The control valve 19 is supplied with air via an air supply line 40.

The capsule delivery unit 13 comprises a source 21 of pressurised air, an air line 22, extending from the air source 21 to a pneumatic material transfer unit 23, and the aforesaid delivery tube 12. The delivery tube 12 intercommunicates the transfer unit 23 and the aforesaid bore 11 in the suction band guide rail 9 or 10. The pneumatic material transfer unit 23 may alternatively be a venturi capsule injector.

In the air line 22 are two pressure regulators 24a and

restrictor 26. The pressure regulator 24a is operable to control air pressure to the transfer unit 23 and the pressure regulator 24b is operable to control the air pressure entering the system. Further, a filter 36 is positioned in the air line 22 to remove air contaminants from the incoming air. A valve 37 positioned in the air line 22 is operable to allow or prevent air flow within air line 22 to the pneumatic material transfer unit 23.

Reference numeral 42 designates a Programmable Logic Controller (PLC), for example a PLC as manufactured by Allen Bradley model no. SLC500. The PLC is interconnected by signal transmission lines 41, 43, 28, 45, 46, 48 and 51 respectively, with a microprocessor 27, a vacuum switch 44, operable to detect a blockage within the capsule delivery unit 13, an encoder 31, an air pressure detector 38, operable to detect air pressure in air line 22, a man-machine-interface (MMI) unit 47, operable to allow operator input into the system and to display system status, a level sensor 49 of the hopper 17 of the refill device 16, and the aforementioned valve 37.

The microprocessor 27 is interconnected by signal transmission lines 41, 29 and 30 respectively with the PLC 42, drive means 32, operable to drive the vibratory feeder 15, and a weighbridge 33 of a capsule feed unit designated by reference numeral 14. The microprocessor 27 is also interconnected, by signal transmission line 34, to the control valve 19 of the conveyor 18 of the refill device 16.

The encoder 31, which is interconnected with the drive shaft 52 of the rod making machine 1, is operable to generate a

signal representative of the current speed of operation of the rod making machine 1.

When the rod making machine 1 is in operation, the capsule delivery unit 13 and the capsule feed unit 14 are operable in conjunction to provide a uniform, continuous and non-pulsed introduction of smoke-modifying agent capsules, through the delivery tube 12, to the upward flow of cut tobacco filler to the suction band 3.

In operation of the capsule delivery unit 13 a uniform air flow is established from the pressurised air source 21, via the line 22 and the transfer unit 23, to and through the delivery tube 12. Smoke-modifying agent capsules are fed, at a rate accurately controlled by the capsule feeder unit 14, to the transfer unit 23 via a hopper 35 thereof, whereupon the capsules are entrained in the air flow and are thus conveyed to and through the delivery tube 12. Upon emerging from the delivery tube 12 (and the bore 11, if applicable), the capsules become entrained in the upwardly directed tobacco-conveying air flow and travel with the tobacco filler to the moving suction band 3.

As is indicated in Figure 1, the location of the introduction of the capsules is at a mid zone of the chimney 2. This ensures that the capsules are deposited on tobacco filler which has already built up on the suction band 3 upstream of the said location of capsule introduction. As the deposited capsules move forward with the band 3 further deposition of the upwardly flowing filler results in the capsules being located generally centrally of the depth of the filler carpet which

making machine 1. This in turn means that the capsules are located generally centrally of the rod formed in the garniture. The capsules are also distributed evenly lengthwise of the rod.

The PLC 42 is operable to ensure that the capsule feed unit 14 feeds capsules to the capsule delivery unit 13 at the feed rate which, relative to the speed of operation of the rod making machine 1, is that required to attain the specified weight of capsules per unit rod length, which specified weight is selected by the operator via the MMI unit 47.

CLAIMS

1. A method incorporating particulate smoke-modifying agent in a smoking material rod, wherein said agent is introduced into a flow of filamentary smoking material to the suction band of a rod making machine, the location of introduction being in the vicinity of the suction band of said machine.
2. A method according to Claim 1, wherein said location of introduction is at the suction band guide rail of said machine.
3. A method according to Claim 2, wherein the path of introduction of the smoke-modifying agent extends through one of the said guide rails.
4. A method according to Claim 1 or 2, wherein the path of introduction of the smoke-modifying agent extends through a wall bounding a chimney of said rod making machine and extends vertically, or substantially vertically, within said chimney.
5. A method according to any one of the preceding claims, wherein said location is situate between about 25% and about 60% of the length of the deposit of said smoking material on said suction band in register with said flow of smoking material to said band taken from the upstream end of said deposit.
6. A method according to Claim 5, wherein said location is situate between about 25% and about 40% of said length.
7. A method according to any one of the preceding claims, wherein said particulate smoke-modifying agent is conveyed

to said location and is introduced into said flow of filamentary smoking material by way of being entrained in a flow of gaseous medium.

8. A method according to any one of the preceding claims, wherein the rate of flow of said particulate smoke-modifying agent to said location is adjustable relative to the speed of operation of said rod making machine.
9. A method according to Claim 8, wherein said rate of flow of said particulate smoke-modifying agent to said location is adjusted in accordance with any changes in the flow rate of said filamentary smoking material to said suction band.
10. A method according to Claim 8 or 9, wherein said rate of flow of said particulate smoke-modifying agent to said location is such that the smoke-modifying agent is incorporated at a uniform mass quantity per unit length of said smoking material rod.
11. A method according to Claim 10, wherein said uniform mass quantity per unit length of said smoking material rod is 10 to 20mg per smoking article unit length of the rod.
12. A method according to any one of Claims 1-9, wherein said flow of said particulate smoke-modifying agent is intermittent, so that in each smoking article rod the product of said machine the smoke-modifying agent is located at a zone thereof, which zone extends over a fraction only of the length of the rod.
13. A method according to Claim 12, wherein said zone of said rod is that zone which accounts for the last few puffs in the smoking of a smoking article comprising said rod.

14. A method according to any one of the preceding claims, wherein said particulate smoke-modifying agent comprises encapsulated flavourant.
15. A method according to Claim 14, wherein said encapsulated flavourant is menthol.
16. A method according to any one of Claims 1-13, wherein said particulate smoke-modifying agent comprises tobacco dust.
17. A method according to Claim 16, wherein said agent further comprises a flavourant.
18. A method according to any one of the preceding claims, wherein the smoke-modifying agent particles are spherical.
19. A method according to Claim 18, wherein said smoke-modifying agent particles have a diameter of about 0.5mm to about 1.0mm.
20. A method according to Claim 18 or 19, wherein said smoke-modifying agent particles are of uniform diameter.
21. A method according to any one of the preceding claims, wherein the smoke-modifying agent particles in bulk are free-flowing.
22. A smoking material rod making machine comprising a suction band, filamentary smoking material feed means and smoke-modifying agent feed means, the smoking material feed means being operable to provide a flow of filamentary smoking material to the suction band and smoke-modifying agent feed means being operable to introduce smoke-modifying agent into said flow, the location of introduction into said flow being in the vicinity of said suction band.

Fig.1.

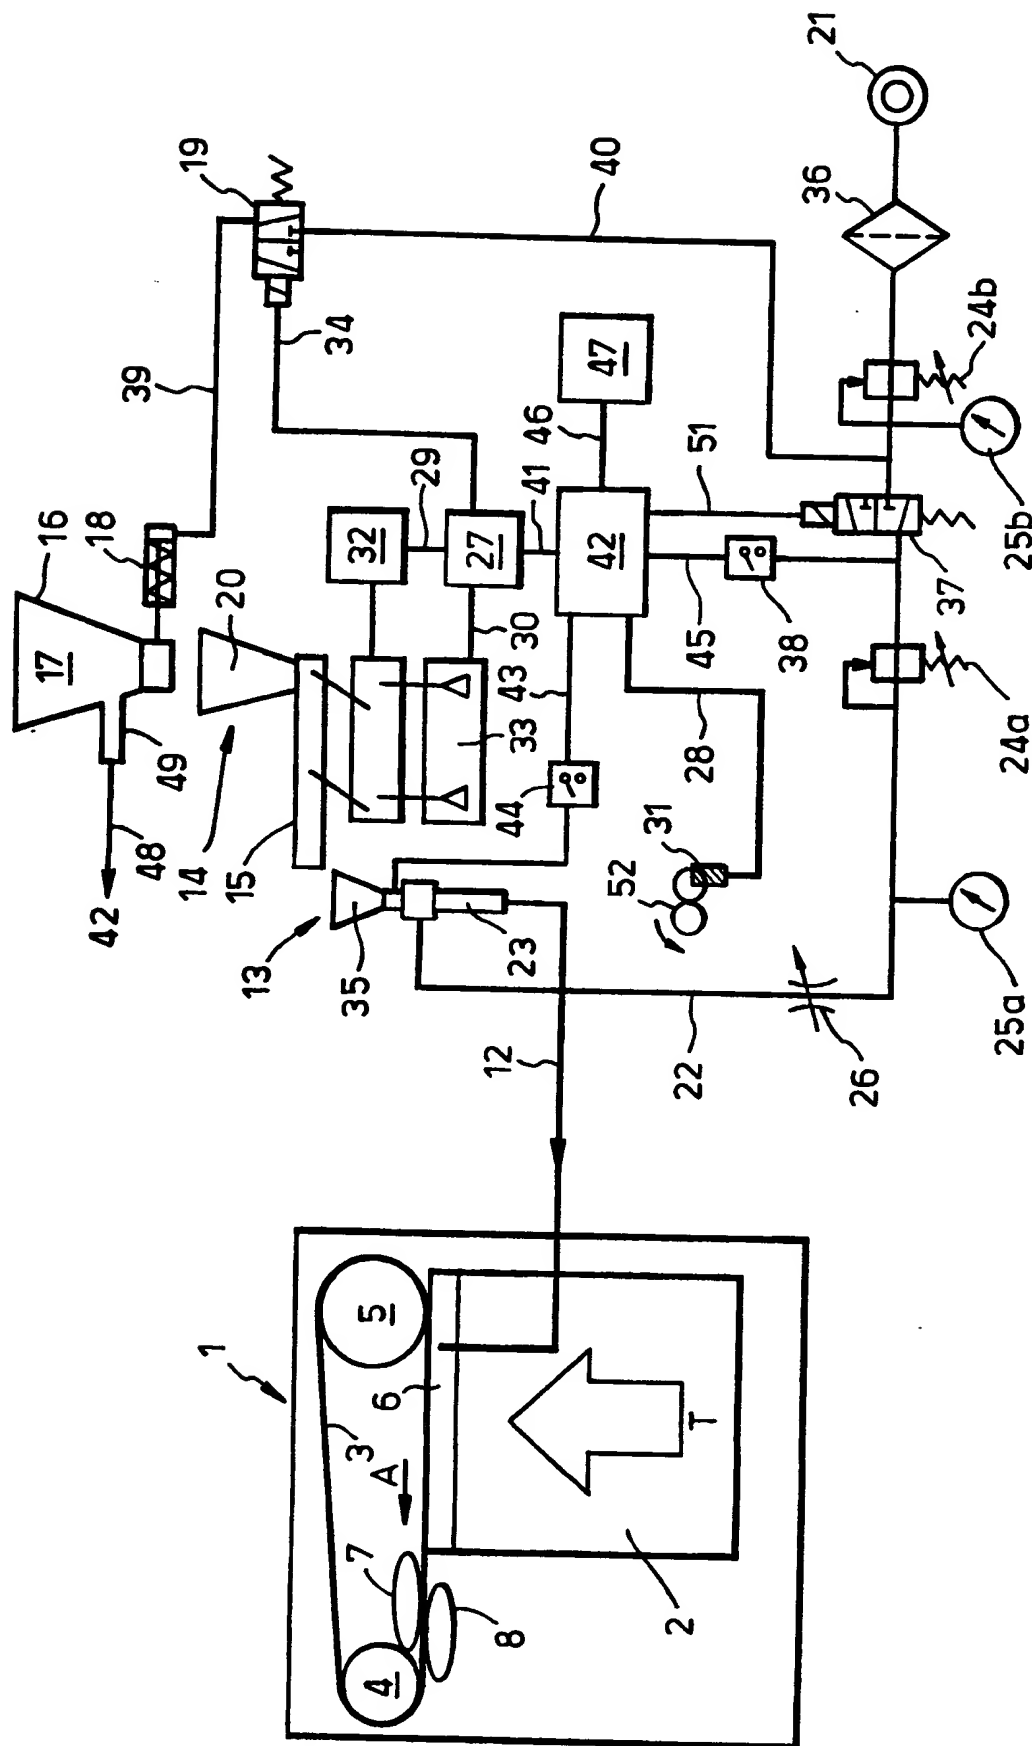


Fig.2.

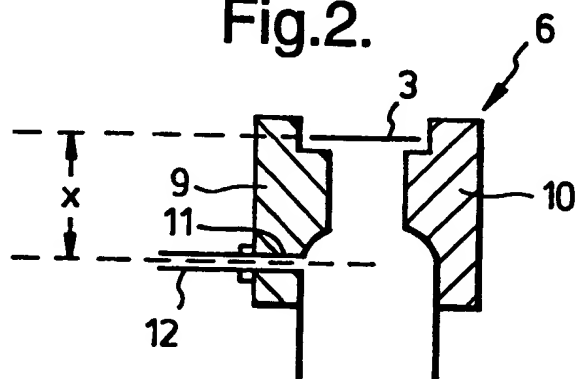


Fig.3.


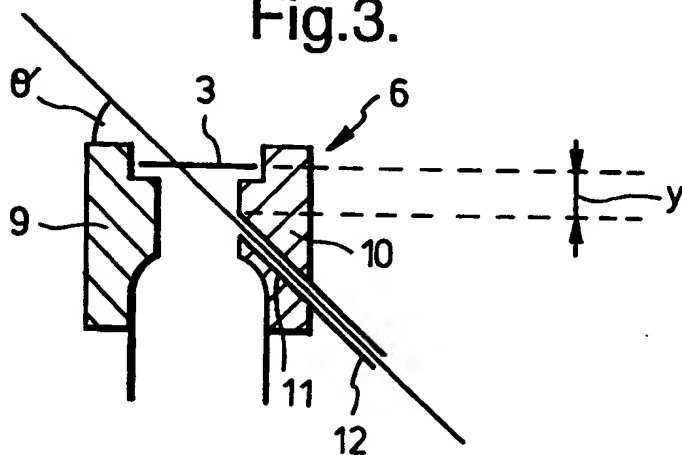


Fig.4.

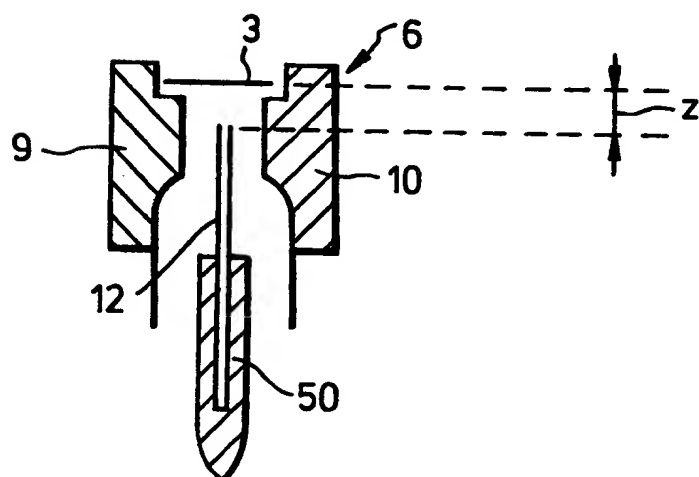

INTERNATIONAL SEARCH REPORT

Inter national Application No

PCT/GB 98/00460

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 A24C5/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A24C A24D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 38 21 677 A (R.J. REYNOLDS TOBACCO) 4 January 1990 see the whole document	22
Y		1-6, 8-10, 12, 14, 15
Y	US 4 409 995 A (NICHOLS) 18 October 1983 cited in the application see the whole document	1-6, 8-10, 12, 14, 15
A	EP 0 405 929 A (PHILIP MORRIS PRODUCTS INC.) 2 January 1991 see the whole document	1-3, 5, 6, 12, 22
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

15 May 1998

Date of mailing of the international search report

26/05/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk

Authorized officer

INTERNATIONAL SEARCH REPORT

Inter nal Application No

PCT/GB 98/00460

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 558 447 A (FABRIQUES DE TABAC REUNIES S.A.) 1 September 1993 see the whole document ----	1,12,22
A	GB 2 108 364 A (BRITISH-AMERICAN TOBACCO COMPANY LIMITED) 18 May 1983 see the whole document ----	1,13,22
X	EP 0 172 654 A (PHILIP MORRIS INCORPORATED) 26 February 1986 see column 5, line 1 - line 28; figures 5,5A ----	22
A	----	1-3
X	EP 0 274 247 A (PHILIP MORRIS INCORPORATED) 13 July 1988 see the whole document ----	22
A	----	1-3
A	GB 1 349 537 A (IMPERIAL GROUP LIMITED) 3 April 1974 cited in the application see the whole document -----	14,15,18

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter Application No

PCT/GB 98/00460

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 3821677 A	04-01-1990	DE 3844620 A US 4995405 A	08-02-1990 26-02-1991
US 4409995 A	18-10-1983	GB 2078488 A,B	13-01-1982
EP 405929 A	02-01-1991	US 4993434 A JP 3039076 A	19-02-1991 20-02-1991
EP 558447 A	01-09-1993	NONE	
GB 2108364 A	18-05-1983	AU 557791 B AU 8965982 A BR 8206369 A CA 1182023 A DE 3240228 A US 5052412 A	08-01-1987 05-05-1983 29-03-1983 05-02-1985 11-05-1983 01-10-1991
EP 172654 A	26-02-1986	US 4619276 A AU 576375 B AU 4574585 A BR 8506864 A CA 1235038 A DE 3560976 A IN 165109 A WO 8601082 A US 5012823 A US 4966170 A	28-10-1986 25-08-1988 06-02-1986 23-09-1986 12-04-1988 23-12-1987 19-08-1989 27-02-1986 07-05-1991 30-10-1990
EP 274247 A	13-07-1988	US 4763672 A AU 602742 B AU 8254287 A DE 3773163 A	16-08-1988 25-10-1990 16-06-1988 24-10-1991
GB 1349537 A	03-04-1974	AU 4157272 A BE 783560 A CA 946243 A CH 570127 A DE 2221778 A FR 2138951 A NL 7207031 A,B,	01-11-1973 18-09-1972 30-04-1974 15-12-1975 21-12-1972 05-01-1973 28-11-1972

Information on patent family members

PCT/GB 98/00460

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 1349537 A		ZA 7202679 A	31-01-1973